


TMR2584

Z Axis TMR Linear Magnetic Sensor

Description

The TMR2584 linear magnetic sensor chip utilizes a unique push-pull Wheatstone bridge structure design, comprising four unshielded high-sensitivity TMR sensor elements capable of sensing a magnetic field perpendicular to the chip's surface. As the external magnetic field changes along the direction perpendicular to the chip's surface, the Wheatstone bridge provides a differential voltage output. Within the range of -40 °C to +125 °C, the sensitivity and offset voltage of the TMR2584 can be maintained at a stable level.


The TMR2584 is available in three packaging forms: TO94, SSIP4, SOT23-5 with P/N of TMR2584T, TMR2584B, and TMR2584S.

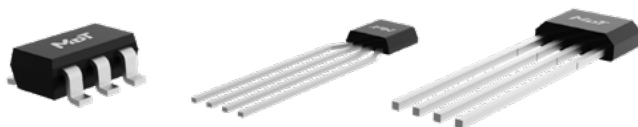


SOT23-5

SSIP4

TO94

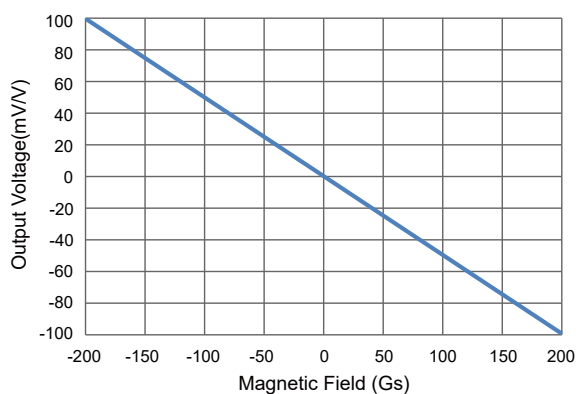

TMR2584 ±200 Gs Output Curve

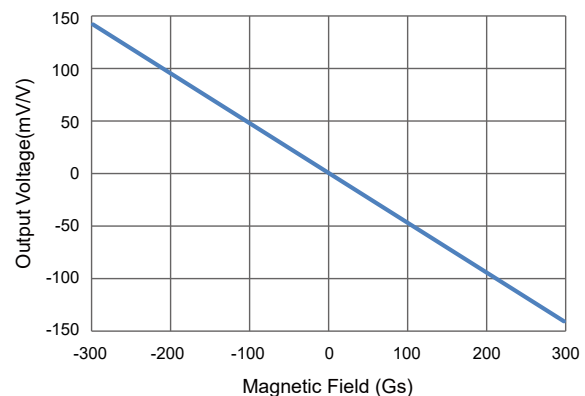

TMR2584 ±300 Gs Output Curve

Features and Benefits

- Tunneling magnetoresistance (TMR) technology
- High sensitivity
- Low power consumption
- Excellent temperature stability
- Low hysteresis
- Wide operating voltage range
- RoHS & REACH compliant

Applications

- Magnetometer
- Current sensor
- Motor drives
- Position sensor

Selection Guide


Part Number	Supply Voltage	Saturation Field	Sensitivity	Package	Packing Form
TMR2584T	1 V to 7 V	±200 Gs	-0.5 mV/V/Gs	TO94	Anti-Static Bag
TMR2584B	1 V to 7 V	±200 Gs	-0.5 mV/V/Gs	SSIP4	Anti-Static Bag
TMR2584S	1 V to 7 V	±200 Gs	-0.5 mV/V/Gs	SOT23-5	Tape & Reel

Catalogue

1. Operating Principle	03
1. Pin Configuration	03
3. Absolute Maximum Ratings	04
4. Electrical Specifications	04
5. Dimensions	05

1. Operating Principle

The TMR2584 sensing axis is Perpendicular to the package top-marking surface; the sensing axis is defined from the N pole toward the S pole, as indicated by the arrow in the figure below.

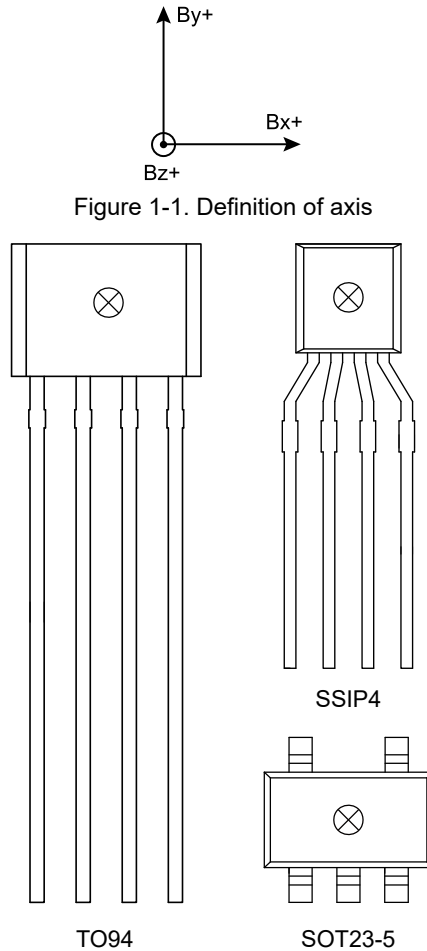

The TMR2584 output voltage varies linearly with the magnetic field along the sensing axis.

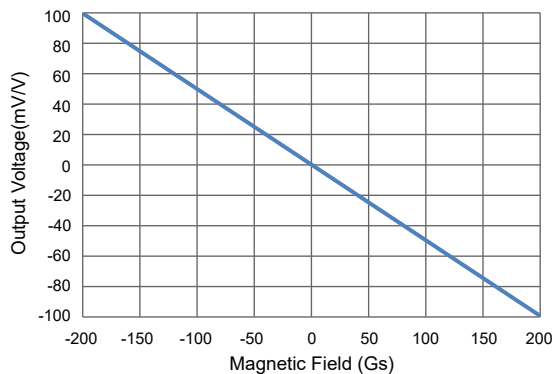


Figure 2. TMR2584 output curve

1. Pin Configuration

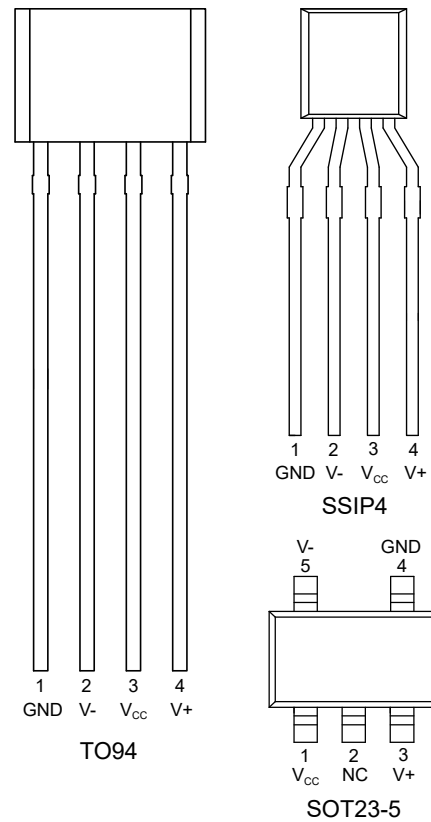


Figure 3. Pin configuration

Pin Number			Name	Function
TO94	SSIP4	SOT23-5		
1	1	4	GND	Ground
2	2	5	V-	Analog differential output 1
3	3	1	V _{CC}	Supply voltage
4	4	3	V+	Analog differential output 2
-	-	2	NC	Not connected

3. Absolute Maximum Ratings

Parameters	Symbol	Min.	Max.	Unit
Supply voltage	V_{CC}	-	7	V
Reverse supply voltage	V_{RCC}	-	-7	V
External magnetic field	B	-	4000	Gs
ESD performance (HBM)	V_{ESD}	-	4000	V
Operating ambient temperature	T_A	-40	125	°C
Storage ambient temperature	T_{STG}	-50	150	°C

4. Electrical Specifications

$V_{CC} = 1.0 \text{ V}$, $T_A = 25 \text{ °C}$, differential output unless otherwise specified

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Supply Voltage	V_{CC}	Operating	-	1	7	V
Supply Current ¹⁾	I_{CC}	Open output, $V_{CC} = 1.0 \text{ V}$	-	0.33	-	mA
Resistance ¹⁾	R_B	-	1	3	5	kΩ
Sensitivity	SEN	B in $\pm 200 \text{ Gs}$	-	-0.5	-	mV/V/Gs
Saturation Magnetic Field	B_{SAT}	-	-300	-	300	Gs
Nonlinearity	NONL	B in $\pm 200 \text{ Gs}$	-	0.3	-	%FS
Offset voltage	V_{OFFSET}	-	-10	-	10	mV/V
Hysteresis	HYS	B in $\pm 200 \text{ Gs}$	-	-	2	Gs
Temperature coefficient of resistance	TCR_B	B = 0 Gs	-	-570	-	PPM/°C
Temperature coefficient of sensitivity	TCS	-40 °C to 125 °C	-	-290	-	PPM/°C
Temperature coefficient of offset voltage	TCO	-40 °C to 125 °C	-	-	0.5	mV

1) $I_{CC} = V_{CC} / R_B$, and supply current changes linearly with supply voltage.

5. Dimensions

TO94 Package

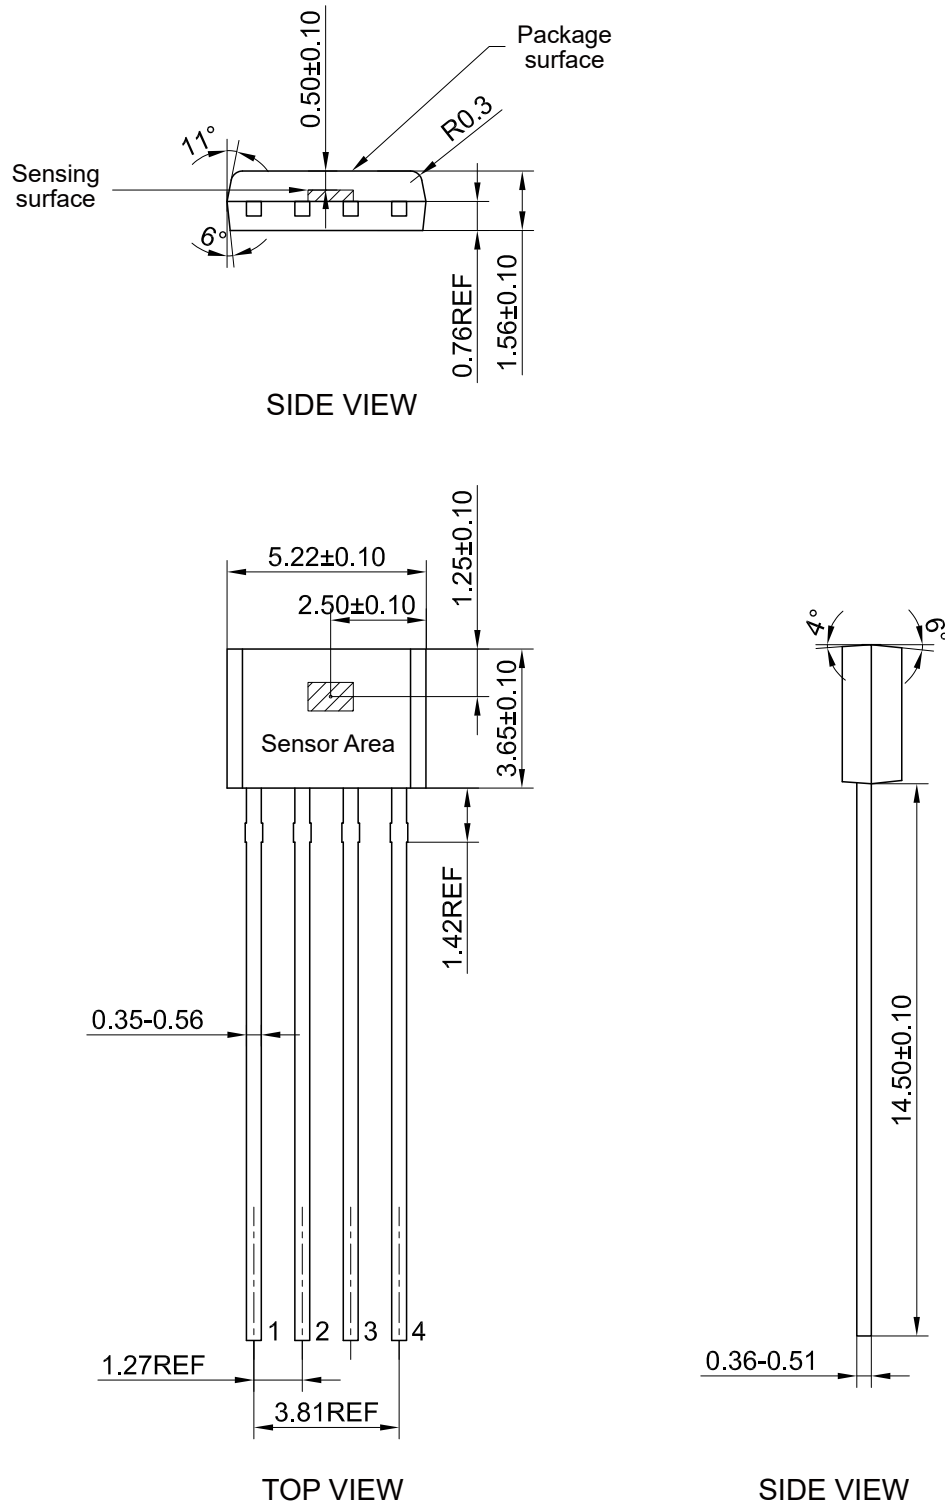


Figure 4. Package outline of TO94 (unit: mm)

SSIP4 Package



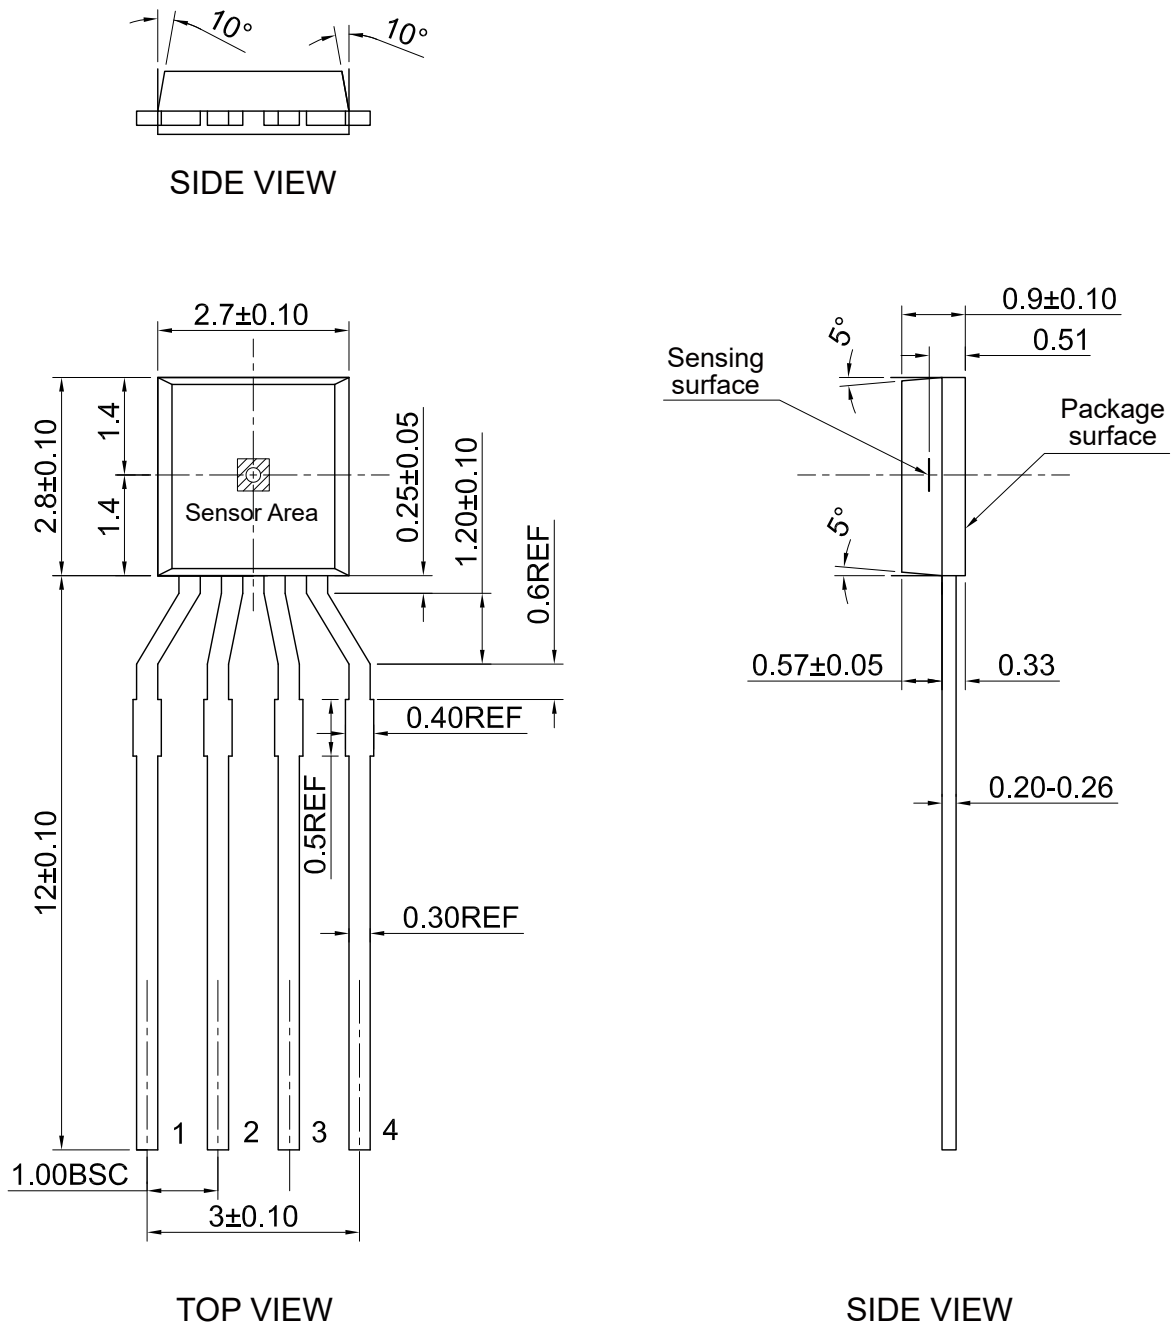


Figure 5. Package outline of SSIP4 (unit: mm)


SOT23-5 Package

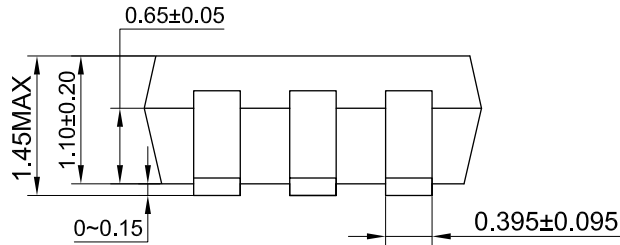

SIDE VIEW

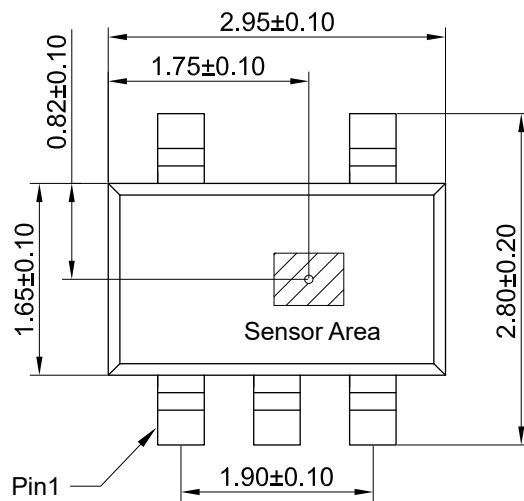

TOP VIEW

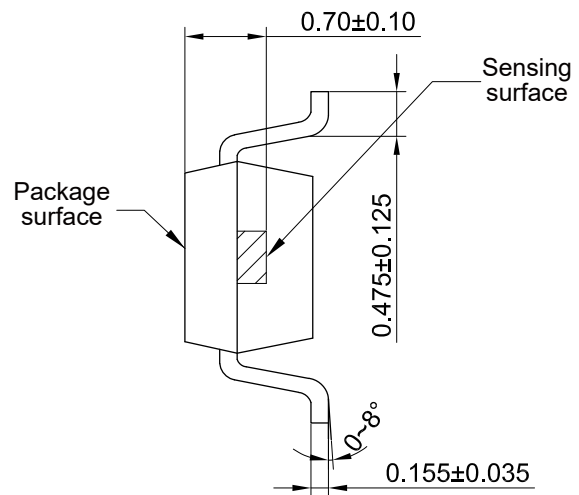

SIDE VIEW

Figure 6. Package outline of SOT23-5 (unit: mm)

Information furnished herein by MultiDimension Technology Co., Ltd. (hereinafter MDT) is believed to be accurate and reliable. However, MDT disclaims any and all warranties and liabilities of any kind, with respect to any examples, hints or any performance or use of technical data as described herein and/or any information regarding the application of the product, including without limitation warranties of non-infringement of intellectual property rights of any third party. This document neither conveys nor implies any license under patent or other industrial or intellectual property rights. Customer or any third-party must further determine the suitability of the MDT products for its applications to avoid the applications default of customer or third-party. MDT accept no liability in this respect.

MDT does not assume any liabilities of any indirect, incidental, punitive, special or consequential damages (including without limitation of lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, MDT's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the terms and conditions of commercial sale of MDT.

Absolute maximum ratings are the extreme limits the device will withstand without damage to the MDT product. However, the electrical and mechanical characteristics are not guaranteed as the maximum limits (above recommended operating conditions) are approached. MDT disclaims any and all warranties and liabilities of the MDT product will operate at absolute maximum ratings.

Specifications may change without notice.

Please download latest document from our official website www.dowaytech.com/en.

Recycling

The product(s) in this document should be disposed of at the end of the product(s) life using a qualified waste management company for recycling in accordance with local regulations.

