


TMR81xx

Single-axis, Low Noise, High Transient Response Magnetic Sensor

Description

The TMR81xx series features single-axis, low-noise, high transient response magnetic sensors that utilize the miniaturized, ultra-low noise TMR sensor. These sensors employ phase-sensitive detection and weak magnetic signal modulation technology to convert broad passband measurements into narrowband measurements. This technique significantly reduces the interference of 1/f noise, enhancing the signal-to-noise ratio of weak magnetic signals. Consequently, it enables high transient response and high-resolution detection of weak magnetic signals, facilitating ultra-long-distance detection of ferromagnetic materials.

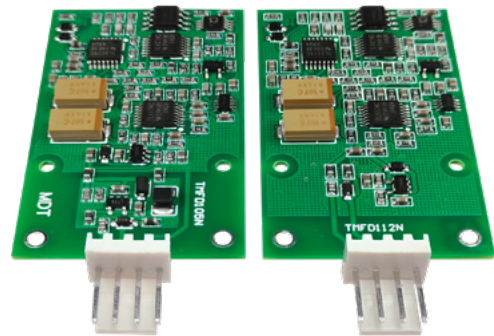

TMR8105N

TMR8112N

Features and Benefits

- Excellent detection capabilities for dynamic weak magnetic fields at low frequencies
- High-resolution measurements
- Large saturation field: typ. $\pm 600 \mu\text{T}$
- Wide background magnetic field: typ. $\pm 300 \mu\text{T}$
- Highly integrated design, easy secondary integration

Applications

- Security system
- Magnetic material detection
- Traffic flow control

Selection Guide

Part Number	Sensing Direction	Frequency Response (-3dB)	Magnetic Field Spectral Noise Density	Supply Voltage	Dimension
TMR8105N	Single axis	0 to 10 Hz	100 pT/ $\sqrt{\text{Hz}}$ @1Hz	5 V	50 mm × 30 mm × 5 mm
TMR8112N	Single axis	0 to 10 Hz	100 pT/ $\sqrt{\text{Hz}}$ @1Hz	12 V	50 mm × 30 mm × 5 mm

1. Specifications


Specification	Typical Value	Unit	Applicable Model
Number of axes	1	-	All models
Saturation field	±600	μT	All models
Measuring range	±300	μT	All models
Frequency response (-3dB)	0 to 10	Hz	All models
Magnetic field spectral noise density	100	pT/√Hz@1Hz	All models
Sensitivity	40	mV/nT	All models
Scaled temperature coefficient	150	PPM/°C	All models
Start Time	100	ms	All models
Electrical balance time	2	min	All models
Maximum deviation at zero magnetic field	±100	nT	All models
Scale error	±5	%	All models
Linearity error	1	%	All models
Hysteresis ¹⁾	0.1	Gs	All models

1) 1 Gs = 100 μT

2. Electrical characteristics parameters

Specification	Min.	Typ.	Max.	Unit	Applicable Model
Supply voltage	4.5	5	5.5	V	TMR8105N
	11	12	12.5	V	TMR8112N
Supply current	40	46	50	mA	TMR8105N
	10	12	14	mA	TMR8112N
Starting current	-	70	-	mA	TMR8105N
	-	15	-	mA	TMR8112N
Voltage protection	-	6	-	V	TMR8105N
	-	13.5	-	V	TMR8112N
Current protection	-	300	-	mA	All models
Analog voltage output	0	-	5	V	TMR8105N
	0	-	10	V	TMR8112N
Reference voltage	-	2.6	-	V	TMR8105N
	-	6.0	-	V	TMR8112N
Output resistance	-	500	-	kΩ (±5%)	All models
Output	Short circuits protection			-	All models

3. Interface Definitio

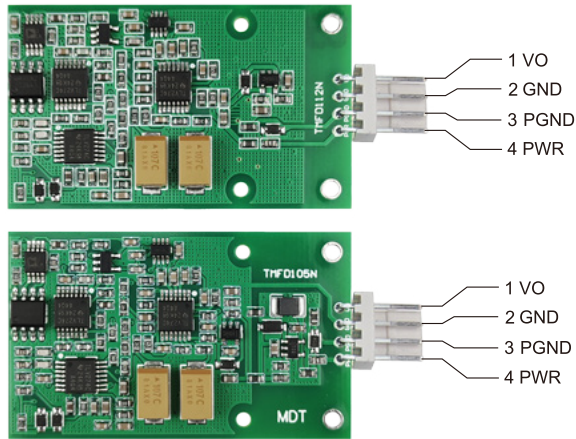

Number	Name	Function
1	VO	Signal
2	GND	Ground
3	PGND	Supply ground
4	PWR	Power supply

4. Mechanical / Interface Specifications

Specification	Parameter	Unit
Dimensions (length × width × height)	50 × 30 × 5	mm
Weight	6	g
Electrical interface	4×Φ0.9, hole center distance 2.5	mm
Mounting interface	4×Φ2, hole center distance 24×13	mm
Sensitive axis direction	Isotropic (> 3 times the maximum size of the target to be measured)	-

5. Storage and Operating Environmental Parameters

Subject	Parameter	Unit
Operating temperature	-20 to +70	°C
Storage temperature	-40 to +85	°C
Environmental protection	Conformal layers	-

Copyright © 2024 by MultiDimension Technology Co., Ltd.

Information furnished herein by MultiDimension Technology Co., Ltd. (hereinafter MDT) is believed to be accurate and reliable. However, MDT disclaims any and all warranties and liabilities of any kind, with respect to any examples, hints or any performance or use of technical data as described herein and/or any information regarding the application of the product, including without limitation warranties of non-infringement of intellectual property rights of any third party. This document neither conveys nor implies any license under patent or other industrial or intellectual property rights. Customer or any third-party must further determine the suitability of the MDT products for its applications to avoid the applications default of customer or third-party. MDT accept no liability in this respect.

MDT does not assume any liabilities of any indirect, incidental, punitive, special or consequential damages (including without limitation of lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, MDT's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the terms and conditions of commercial sale of MDT.

Absolute maximum ratings are the extreme limits the device will withstand without damage to the MDT product. However, the electrical and mechanical characteristics are not guaranteed as the maximum limits (above recommended operating conditions) are approached. MDT disclaims any and all warranties and liabilities of the MDT product will operate at absolute maximum ratings.

Specifications may change without notice.

Please download latest document from our official website www.dowaytech.com/en.

Recycling

The product(s) in this document need to be handed over to a qualified solid waste management services company for recycling in accordance with relevant regulations on waste classification after the end of the product(s) life.



No.2 Guangdong Road, Zhangjiagang Free Trade Zone, Jiangsu, China

Web: www.dowaytech.com/en E-mail: info@dowaytech.com

